

SW41SK-SW81SK

LOW COST SEQUENTIAL SWITCHERS

REVISION 0945



MAIN FEATURES

4/8 video inputs - 1 video output

Adjustable switching time

Skip function

DESCRIPTION

SW41SK and SW81SK units are sequential switchers, constructed from sturdy aluminium, equipped respectively with 4 and 8 video inputs and 1 video output. The selection of the video input can be performed manually or in automatic switching.

In automatic mode, the switching time can be adjusted by means of a potentiometer (from 0.5 to 30 seconds).



The active video input and the automatic mode are signalled by red LEDs built-in on the push-buttons.



SW41SK



SW81SK

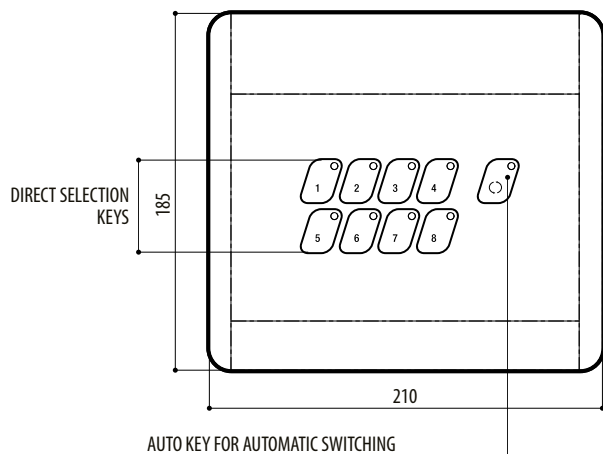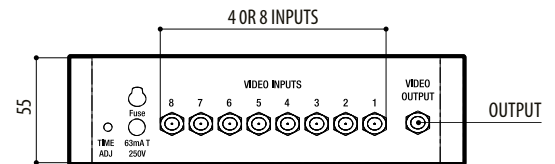

SW81SK

mm 1:4

SW41SK-SW81SK**TECHNICAL DATA****GENERAL**

Max 4-8 cameras
 Ability to switch each video input to the output channel
 Ability to display on the outlet channel a switching cycle of the connected video inputs
 Switching time adjustable by the operator (from 0.5 up to 30 seconds)
 Supplied with instruction manual

MECHANICAL

constructed from aluminium
 Epoxypolyester powder painting, grey colour
 Local keyboard in polycarbonate
 Dimensions: 230x190x50mm (9x7.4x1.9in)
 Power supply jack connector
 Potentiometer TIME
 1 BNC video output
 4/8 BNC video inputs

ELECTRICAL

4/8 inputs, 750hms 1 Vpp
 1 output 750hms 1 Vpp
 Band width: >6MHz
 Cross-talk: -50dB
 Power supply: 230Vac, 50/60Hz
 Power consumption: 4W
 Fuse: 50 mA 250V

ENVIRONMENT

Indoor
 Operating temperature: 0° C / +45° C (+32° F / +113° F)

CERTIFICATIONS

CE EN61000-6-3, EN60065, EN50130-4

PACKAGE

Code	Unit weight		Package weight		Package dimensions (WxHxL)		Master carton
	kg	lb	kg	lb	cm	in	unit
SW14SK	1.1	2.4	1.3	2.9	25.0x6.5x25.0	9.8x2.5x9.8	20
SW81SK	1.1	2.4	1.3	2.9	25.0x6.5x25.0	9.8x2.5x9.8	20